

**Link WS - REST
Cookbook
Version 1.9**

This document is provided to you free of charge by the

eHealth platform

**Willebroekkaai 38
38, Quai de Willebroek
1000 BRUSSELS**

All are free to circulate this document with reference to the URL source.

Table of contents

Table of contents	2
1. Document management	4
1.1 Document history.....	4
2. Introduction	5
2.1 Goal of the service	5
2.1.1 Therapeutic Links.....	5
2.1.2 Care Links.....	6
2.2 Goal of the document	6
2.3 eHealth document references	7
3. Support	8
3.1 Helpdesk eHealth platform	8
3.1.1 Certificates.....	8
3.1.2 For issues in production	8
3.1.3 For issues in acceptance.....	8
3.1.4 For business issues	8
3.2 Status	8
3.3 IAM Connect.....	8
4. Global overview	9
5. Step-by-step	10
5.1 Technical requirements.....	10
5.1.1 eHealth platform Authentication.....	10
5.1.2 Tracing	11
5.2 The Link REST Service	11
5.2.1 POST /careLinks	11
5.2.2 DELETE /careLinks.....	20
5.3 GET /careLinks.....	21
5.4 GET /careLinks/existences	23
5.5 GET /careLinks/histories	25
5.6 GET /careLinks/Pages.....	27
5.7 GET /careLinks/histories/pages	29
6. Risks and security	33
6.1 Risks & safety	33
6.2 Security	33
6.2.1 Business security	33
6.2.2 The use of username, password and token.....	33
7. Implementation aspects	34
7.1 Procedure.....	34
7.1.1 Initiation	34
7.1.2 Development and test procedure	34
7.1.3 Release procedure.....	34



7.1.4	Operational follow-up	34
8.	Error and failure messages	35
8.1	HTTP codes	35
8.1.1	HTTP 2xx	35
8.1.2	HTTP 500.....	35
8.1.3	HTTP 400.....	35
9.	Annex 1 – Claim structure	38
9.1	Organization (No-AR78)	38

To the attention of: “IT expert” willing to integrate this web service.



1. Document management

1.1 Document history

Version	Date	Author	Description of changes / remarks
1.0	30/04/2020	eHealth platform	Initial version
1.1	04/06/2020	eHealth platform	Modifications of the HEAD method User roles
1.2	22/06/2020	eHealth platform	Dates validations (POST) Mapping error code / messages New born management : <ul style="list-style-type: none">- SSIN support card number is not required. Remove user roles linked to therapeutic links
1.3	18/09/2020	eHealth platform	Add error code / message for ERR051
1.4	01/03/2021	eHealth platform	Adaptation of user roles Review mapping error code / messages
1.5	26/03/2021	eHealth platform	Modification of the resource_access for Link (roles in the access token)
1.6	06/07/2021	eHealth platform	Review (update + add) mapping error code / messages Support of care relation at the CBE level for non-COT organizations Interface simplification : hcParty becomes optional for POST and GET operations
1.7	01/08/2022	eHealth platform	§ 2.3 eHealth document references (updated) § 3 Support (updated) § 5.1.2 Tracing (added)
1.8	02/05/2024	eHealth platform	Add new methods with pagination for consultation (GET / GET History)
1.9	23/03/2026	eHealth platform	Update tracing section and contact center hour

2. Introduction

2.1 Goal of the service

The existence of a therapeutic or a care relationship is one of the fundamental prerequisites for the HealthCare providers to access a patient's medical data. Therefore, the eHealth platform makes available to the actors involved in the exchange, storage or referencing personal data, a relay service to manage those therapeutic or care relationships and associated means of evidence¹.

This relay service is obviously limited to therapeutic and care links, made available at the eHealth platform level by the 'owner' of this therapeutic or care link (such as the HC party declaring a therapeutic or care link or the actor responsible of a recognized specific database, e.g. for Global Medical File relationship).

2.1.1 Therapeutic Links

A therapeutic link is a relationship between a patient and an entity that is included in the A.R.78 list of Health Care providers (called HC party AR78) for a certain type of therapeutic relationships over a period of validity depending on the given evidence. These relationships are stored at the Collège Inter-mutualiste National – Inter-mutualistisch College (CIN/NIC - MyCareNet). Regarding these relationships: it is not possible to update an existing therapeutic link. To update information one first needs to revoke the existing therapeutic link.

However, the period of validity of an active therapeutic link could be extended provided that

- the start -date of the new period is greater or equal to the start date of the period to be extended and
- the end-date of the new period is later than the end-date of the period to be extended (overlap of period of validity)

The following operations will support the management of these links²:

POST /therapeuticLinks	Used to declare the therapeutic links. Its main purpose is to allow one to declare a therapeutic link.
DELETE /therapeuticLinks	Used to revoke the therapeutic links. Its main purpose is to allow one to "end" the (declaration of a) therapeutic link.
GET /therapeuticLinks	Used to consult therapeutic links according to basic search parameters. Its main purpose is to allow one to check the existence of the therapeutic links when executing a consultation process.

The therapeutic links are managed, according to the rules corresponding to the type of therapeutic link, through:

- specific **WS** by HC professionals as end-users through their usual software or through an authorized organization³,
- dedicated web applications, currently called **PHV MyHealth**⁴ and **Vitalink MyHealthViewer**⁴ available for patients.

¹ Supported evidences are described in the paragraph 5.2.1.3.

² Global Medical File (gmd) does support neither declaration nor revocation. Only physicians are allowed to consult 'gmd'.

³ Only the consultation service is available for healthcare professionals through authorized organizations.

⁴ PHV MyHealth and Vitalink MyHealthViewer Web Applications manage also patient consent and healthcare party exclusions.



General comments

The proposed interfaces are **extensions** of the interfaces defined for the same purpose in the context of the hub & metahub project (see <https://www.ehealth.fgov.be/standards/kmehr/nl>).

Those interfaces are quite “generic” meaning they support various combinations of the input parameters. The service does not support all the possible combinations at the interface level. The rationale for this is mainly to preserve the privacy of the patient, but sometimes for technical reasons.

Please consult the associated deliberations of the “Comité Sectoriel Section Santé” for more information about the rules and principles of utilization of this service.

2.1.2 Care Links

A care link is a relationship between a patient and an entity that is not included in the A.R.78 list of Health Care providers (called HC party no-AR78) for a certain type of care relationships over a period of validity depending on the given evidence. These relationships are stored at eHealth platform. Regarding these relationships, it is possible to update an existing relationship. To update the validity period of an existing relationship, you need to create the relationship with the new information again.

The following operations will support the management of these links :

POST /careLinks	Used to declare or extend the care links. Its main purpose is to allow one to declare a care link.
DELETE /careLinks	Used to revoke the care links. Its main purpose is to allow one to “end” the (declaration of a) care link.
GET /careLinks	Used to consult active care links according to basic search parameters. Its main purpose is to allow one to retrieve a list of the existing care links when executing a consultation process.
GET /careLinks/existences	Used to consult care links according to basic search parameters. Its main purpose is to allow one to check the existence of an active care link when executing a consultation process. This method’s main difference with the GET method is that it is more lightweight and faster to respond.
GET /careLinks/histories	Used to consult inactive care links according to basic search parameters. Its main purpose is to allow one to retrieve a list of the existing care links when executing a consultation process.
GET /careLinks/pages	Used to consult active care links according to basic search parameters. Its main purpose is to allow one to retrieve a list of the existing care links when executing a consultation process with the pagination system.
GET /careLinks/histories/pages	Used to consult inactive care links according to basic search parameters. Its main purpose is to allow one to retrieve a list of the existing care links when executing a consultation process with the pagination system.

2.2 Goal of the document

This document describes the use of the Link service as provided by the eHealth platform. In this cookbook, we explain the structure and content aspects of the possible requests and the replies of a Link WS with an example to illustrate each of them. In addition, a list of possible errors can be found in this document.

This information should allow (the IT department of) an organization to develop and use the WS call.

Some technical and legal requirements must be met in order to allow the integration of the eHealth WS in client applications.



This document is neither a development nor a programming guide for internal applications: eHealth partners always keep a total freedom within those fields. Nevertheless, in order to interact in a smooth, homogeneous and risk controlled way with a maximum of partners, eHealth partners must commit to comply with specifications, data format, and release processes described within this document. In addition, our partners in the health sector must also comply with the business rules of validation and integration of data within their own applications in order to minimize errors and incidents.

Warning : In the current version of this document and the REST interface, eHealth only defines the specifications related to the management of care links. The specifications related to the management of therapeutic links will be described in a future version, the date of which has not yet been defined.

2.3 eHealth document references

All the document references can be found on the eHealth platform portal⁵. These versions or any following versions can be used for the eHealth platform service.

ID	Title	Version	Date	Author
1	eHealth Services – Web Access	2.0	12/07/2018	eHealth platform
2	IAM Connect Technical specifications	1.5	26/06/2021	eHealth platform
3	IAM Connect – HealthCare Client Registration (Form)	1.2	28/06/2021	eHealth platform
4	IAM Connect – M2M Client registration (Form)	1.1	07/07/2021	eHealth platform
5	Request test case template (Form)	3.0	22/02/2018	eHealth platform

⁵ <https://www.ehealth.fgov.be/ehealthplatform>

3. Support

3.1 Helpdesk eHealth platform

3.1.1 Certificates

In order to access the secured eHealth platform environment you have to obtain an eHealth platform certificate, used to identify the initiator of the request. In case you do not have one, please consult the chapter about the eHealth Certificates on the portal of the eHealth platform

- <https://www.ehealth.fgov.be/ehealthplatform/nl/ehealth-certificaten>
- <https://www.ehealth.fgov.be/ehealthplatform/fr/certificats-ehealth>

For technical issues regarding eHealth platform certificates

- Acceptance: acceptance-certificates@ehealth.fgov.be
- Production: support@ehealth.fgov.be

3.1.2 For issues in production

eHealth platform contact centre:

- Phone: 02 788 51 55 (on working days from 8 am till 6 pm)
- Mail: support@ehealth.fgov.be
- Contact Form :
 - <https://www.ehealth.fgov.be/ehealthplatform/nl/contact> (Dutch)
 - <https://www.ehealth.fgov.be/ehealthplatform/fr/contact> (French)

3.1.3 For issues in acceptance

Integration-support@ehealth.fgov.be

3.1.4 For business issues

- regarding an existing project: the project manager in charge of the application or service
- regarding a new project or other business issues: info@ehealth.fgov.be

3.2 Status

The website <https://status.ehealth.fgov.be> is the monitoring and information tool for the ICT functioning of the eHealth services that are partners of the Belgian eHealth system.

3.3 IAM Connect

In order to use the Link REST service you have to obtain an “Access token” which is delivered through IAM Connect. You can find more information about IAM Connect and how to register a client in IAM Connect on the IAM eHealth portal page:

Dutch version:

<https://www.ehealth.fgov.be/ehealthplatform/nl/service-iam-identity-access-management>


French version:

<https://www.ehealth.fgov.be/ehealthplatform/fr/service-iam-identity-access-management>



4. Global overview

Schema

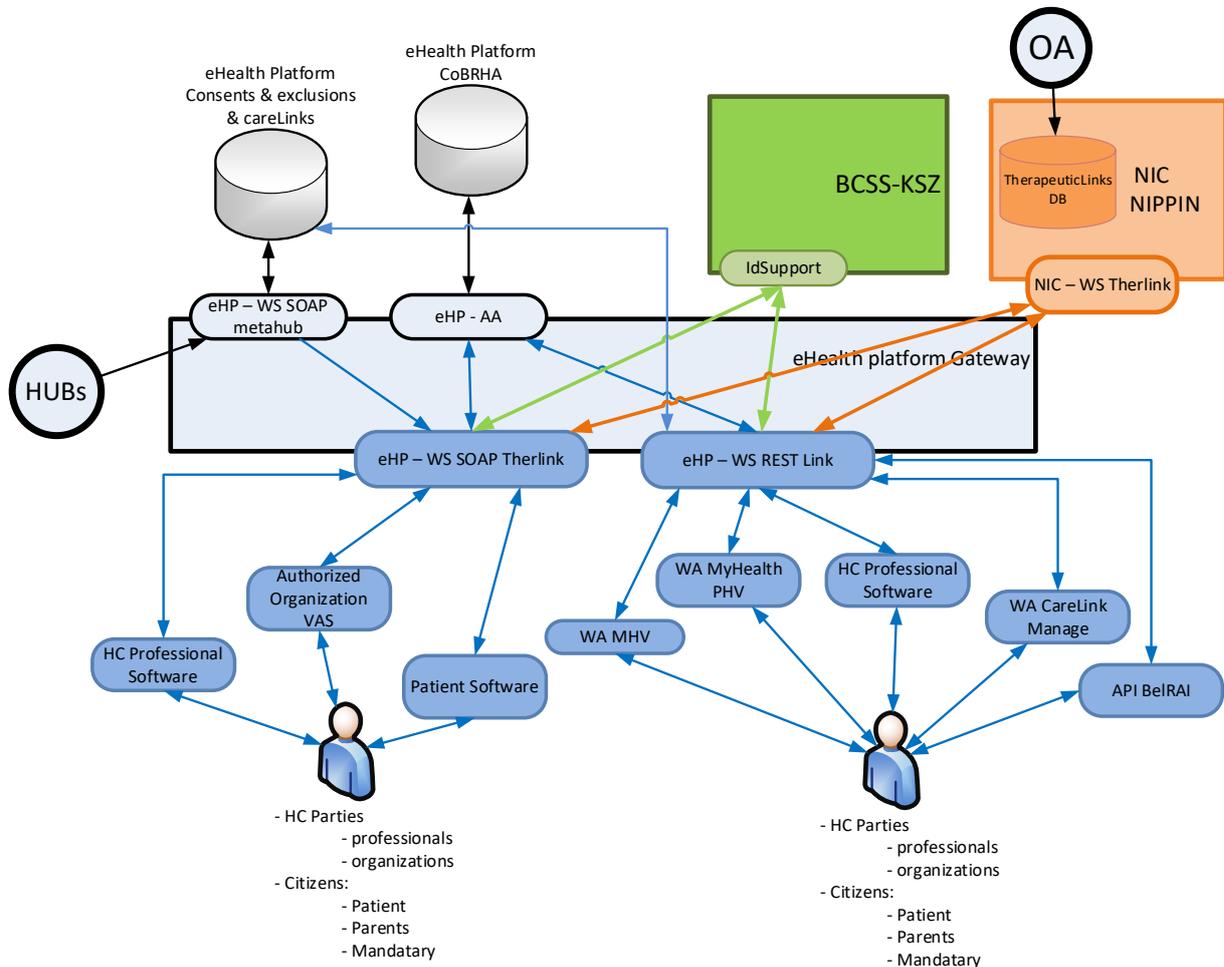

The schema gives the users of this cookbook the overview of the management of the therapeutic and care links.

- The PHV MyHealth and MHV WA will allow patients (incl. patient's parents or mandataries) to manage the therapeutic links (declaration, revocation, and consultation) by calling the eHealth Link WS (REST).
- The authorized HC parties and citizen (incl. concerned patients, parents of patients or patient's mandataries) are also able to perform the same operations throughout their usual software by calling the eHealth therapeutic link WS (SOAP) or Link WS (REST).
- The authorized HC organizations are only authorized to verify the existence of the therapeutic links before allowing the HC parties to access the medical data of the patients by calling the therapeutic link consultation WS (SOAP) through their application.
- The CareLink Manage WA will allow no-AR78 care providers belonging to a organizations that do not meet the conditions of the Circle of Trust (called no-COT) to manage the care links (declaration, revocation, and consultation) by calling the eHealth Link WS (REST).
- The BeIRAI API will allow BeIRAI to verify and consult the existence of care links in the context of access management to their applications and related functionalities.
- Some authorized HC organizations may manage the care links (declaration, revocation, and consultation) by calling the eHealth Link WS (REST) through their application.

5. Step-by-step

5.1 Technical requirements

5.1.1 eHealth platform Authentication

As explained previously, to use the Link Rest service, you must have an access token delivered through IAM Connect.

Several roles and profiles are defined for the using of the Link Rest service.

Possible roles :

- `manage-carelink-orgcot` : This role must be present in the access token for a COT organization in order to use the POST and DELETE methods of the service on the `/careLinks` resource URI.
- `manage-carelink-orgnocot` : This role must be present in the access token for a non-COT organization in order to use the POST and DELETE methods of the service on the `/careLinks` resource URI.
- `consult-carelink-orgcot` : This role, if present in the access token for a COT organization, allows the usage of the GET method of the service on the `/careLinks` , `/careLinks/existences` and `/careLinks/histories` resource URI with restrictions. These restrictions allow the user to consult only for himself as a `hcParty`.
- `consult-carelink-orgnocot` : This role, if present in the access token for a non-COT organization, allows the usage of the GET method of the service on the `/careLinks` , `/careLinks/existences` and `/careLinks/histories` resource URI with restrictions. These restrictions allow the user to consult only for himself as a `hcParty`.
- `verify-carelink` : This role, if present in the access token, allows the usage of the GET method of the service on the `/careLinks/existences` resource URI without restriction. The lack of restriction implies that the user can consult for himself (as a patient or `hcParty`) but also for other `hcParty`.
- `consult-carelink-superuser` : This role, if present in the access token, allows the usage of the GET method of the service on the `/careLinks` , `/careLinks/existences` and `/careLinks/histories` resource URI without restriction. The lack of restriction implies that the user can consult for himself (as a patient or `hcParty`) but also for other `hcParty`.
- `monitoring` : This role must be present in the access token in order to use the monitoring methods (`/health`) of the service.

Presentation of the roles and profiles in the access token:

```
"resource_access": {
  "ehealth-padac-link-api":
  {
    "roles": [
      "consult-carelink-orgnocot",
      "manage-carelink-orgnocot",
    ]
  }
}
```

5.1.2 Tracing

To use this service, the request SHOULD contain the following two http header values (see RFC <https://datatracker.ietf.org/doc/html/rfc7231#section-5.5.3>):

1. **User-Agent:** information identifying the software product and underlying technical stack/platform. It MUST include the minimal identification information of the software such that the emergency contact (see below) can uniquely identify the component.
 - a. Pattern: {minimal software information}/{version} {minimal connector information}/{connector-package-version}
 - b. Regular expression for each subset (separated by a space) of the pattern: `[[a-zA-Z0-9-\\V]*\\V[0-9azA-Z-_.]*`
 - c. *Examples:*
User-Agent: myProduct/62.310.4 Technical/3.19.0
User-Agent: Topaz-XXXX/123.23.X freeconnector/XXXXX.XXX
2. **From:** email-address that can be used for emergency contact in case of an operational problem.

Examples:

From: ***info@mycompany.be***

Exception for Browser-Based Clients

Browsers control the User-Agent header natively and may block client-side modification for security reasons. When operating in a browser-based environment, supplying the custom User-Agent header is **not required**. That said, it **must** be included whenever the environment permits it.

The From header carries no such restriction and **must** be present in all requests, regardless of environment.

The REST interface is described with a JSON/ Swagger API.

The Link WS has the following endpoints :

- Acceptance environment: ***https://api-acpt.ehealth.fgov.be/links/v1***
- Production environment: ***https://api.ehealth.fgov.be/links/v1***

5.2 The Link REST Service

5.2.1 POST /careLinks

This method allows to create a care link between a patient and a HC Party.

5.2.1.1 Request

Element	Description
patient (mandatory)	Identification of the patient concerned by the care link. The identification data of the concerned patient : <ul style="list-style-type: none">• The SSIN• The support card number• The first name and the family name



	<p>The SSIN is mandatory. The element <i>'identifiers.type'</i> must be <i>'ssin'</i>.</p> <p>The support card number can be :</p> <ul style="list-style-type: none"> • The e-ID card number (mandatory if the given proof is the e-ID card reading or e-ID card encoding); • The ISI+ card number (mandatory if the given proof is the reading of the ISI+ card); <p>The element <i>'name'</i> must contain at least one non-empty character whilst the element <i>'firstname'</i> can be empty.</p>
<p>hcParty (optional)</p>	<p>Identification of the HC party concerned by the care link.</p> <p>The HC Party can be a HC professional or an organization.</p> <p>The identification data if the HC party is a HC professional :</p> <ul style="list-style-type: none"> • The SSIN number • The first name and the family name <p>The SSIN is mandatory. In that case, the element <i>'identifiers.type'</i> must be <i>'ssin'</i>.</p> <p>The element <i>'name'</i> must contain at least one non-empty character whilst the element <i>'firstname'</i> can be empty.</p> <p>The identification data if the HC party is an organization :</p> <ul style="list-style-type: none"> • The organization identifier, either : <ul style="list-style-type: none"> A CBE number (10 digits) A NIHII number (8 digits or 11 digits) An EHP number (10 digits) • The name <p>The organization CBE, EHP or NIHII number is mandatory. Depending on the type of identifier, the element <i>'identifiers.type'</i> should be <i>'cbe'</i>, <i>'ehp'</i> or <i>'nihii'</i>.</p> <p>The element <i>'name'</i> must contain at least one non-empty character.</p> <p>The element <i>'hcParty'</i> is optional and should not be used if the user role is included in the following list :</p> <ul style="list-style-type: none"> • <i>'manage-carelink-orgcot'</i> • <i>'manage-carelink-orgnocot'</i>

	<p>For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.</p> <hr/> <p>Warning: it is possible in the future to have a ban on the use of this element following a decision by BelRAI VL which still has to be taken. In that case, if provided then the request will be rejected.</p> <hr/>
proof (optional)	<p>The type of the proof⁶.</p> <p>The element <i>'proof'</i> can be :</p> <ul style="list-style-type: none"> • <i>'eidreading'</i> • <i>'eidencoding_nocard'</i> • <i>'eidencoding_housecall'</i> • <i>'eidencoding_techproblem'</i> • <i>'isireading'</i> • <i>'phone_call'</i> • <i>'contract'</i> <p>The concept of the proof is not applied (not mandatory) when the concerned patient is a new born (0 < patient's date of birth < 3 months) unless the care link is created under a contract or a phone call :</p> <ul style="list-style-type: none"> • If the care link is created under a contract or a phone call, the element <i>'proof'</i> is mandatory but no support card number must be specified. • If the care link is not created under a contract or a phone call, the element <i>'proof'</i> is optional, should not be used and no support card number must be specified.
type (mandatory)	<p>The type of the care link⁷ (mandatory).</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • <i>'careinstitutionremotecontact'</i> • <i>'careinstitutiondaycare'</i> • <i>'careinstitutionstay'</i> <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • <i>'carerelation'</i>
startDate (optional)	<p>The inclusive start date of the validity period of the care link.</p>

⁶ Supported evidences are described in the paragraph 5.2.1.3

⁷ The given evidence must correspond and be valid to the type of link (see paragraph 5.2.1.3)

	<p>The element '<i>startDate</i>' is optional and should not be used if the proof type is different from '<i>contract</i>':</p> <ul style="list-style-type: none"> • If provided and the proof type is '<i>contract</i>' then the start date must be greater or equal to the declaration date i.e. the date when the declaration request is processed (the current date) else, the request is rejected. • If provided and the proof type is different from '<i>contract</i>' then the request is rejected. • If not provided then the start date is enriched with the declaration date i.e. the date when the declaration request is processed (the current date).
<p>endDate (optional)</p>	<p>The exclusive end date of the validity period of the care link.</p> <p>The element '<i>endDate</i>' is optional, depending on the given evidence and should not be used if the proof type is different from '<i>contract</i>' :</p> <ul style="list-style-type: none"> - If provided and the proof type is '<i>contract</i>' then the end date must be strictly greater to '<i>startDate</i>' else, the request is rejected. - If provided and the proof type is different from '<i>contract</i>' then the request is rejected. - If not provided then the end date is enriched according the following rule : endDate = startDate + the default period of validity. <p>The default period of validity is defined as follows depending on the type of proof :</p> <ul style="list-style-type: none"> • '<i>eidreading</i>', '<i>eidencoding_nocard</i>', '<i>eidencoding_housecall</i>', '<i>eidencoding_techproblem</i>', '<i>isireading</i>' : 24 months • '<i>phone_call</i>' : 1 month • '<i>contract</i>' : unlimited <p>Update of care link : To update the validity period of an existing relationship, you need to repost the same care link with new dates.</p>

Examples:

- **Creation of a care link with an HC organization using a type of proof other than 'contract'**

The business rules for creating and merging care links described above are illustrated in the following diagram. In this diagram, we post the blue care link (with a start / end date defined by default defined by default according to the rules above). All the care links in the example **must be of** the same type.

Creation case	New CareLink Proof Type	Schema												Http code																												
		T-3	T-2	T-1	T_0	T+1	T+2	T+3	T+4	T+5	T+6	T-3	T-2	T-1	T_0	T+1	T+2	T+3	T+4	T+5	T+6																					
1	Non-Contract																																									
2	Non-Contract																																									
3	Non-Contract				*																																					
4	Non-Contract																																									
5	Non-Contract																																									
6	Non-Contract																																									
7	Non-Contract																																									
8	Non-Contract																																									
9	Non-Contract																																									
10	Non-Contract																																									
11	Non-Contract																																									
12	Non-Contract																																									
13	Non-Contract																																									
14	Non-Contract																																									

For any patient (more than 3 months) :

POST /careLinks

```

{
  "patient": {
    "identifiers": [
      {
        "type": "ssin",
        "value": "9xxxxxxxxx1"
      },
      {
        "type": "cardNumber",
        "value": "5xxxxxxxxxx9"
      }
    ],
    "name": "PatientLastName",
    "firstName": "PatientFirstName"
  },
  "proof": {
    "type": "eidreading"
  },
  "type": "careinstitutiondaycare"
}

```



For a new born patient (less than 3 months) :

POST /careLinks

```

{
  "patient": {
    "identifiers": [
      {
        "type": "ssin",
        "value": "9xxxxxxxxx1"
      }
    ],
    "name": "PatientLastName",
    "firstName": "PatientFirstName"
  },
  "type": "careinstitutiondaycare"
}

```


- **Creation of a care link with a HCP organization using 'contract' as type of proof**

The management of care links created under a contract allows the creation of care links in the future, in addition to the "classic" creation of other types of evidence. This means that it is possible to have at most two existing care links containing identical information: one care link active in the present and the second inactive in the future.

The following business rules are applied :

1. Only one care link created under a contract per type of care link can be created for the future.
2. It is impossible to create another care link for the future. If the user posts a new one, it replaces the existing one.
3. Inactive care links with a validity period in the future can be consulted and revoked.

The business rules for creating and merging care links described above are illustrated in the following diagram. On this diagram, we post the blue care link (with a start / end date defined by default according to the rules above). All the care links in the example **must be of** the same type.

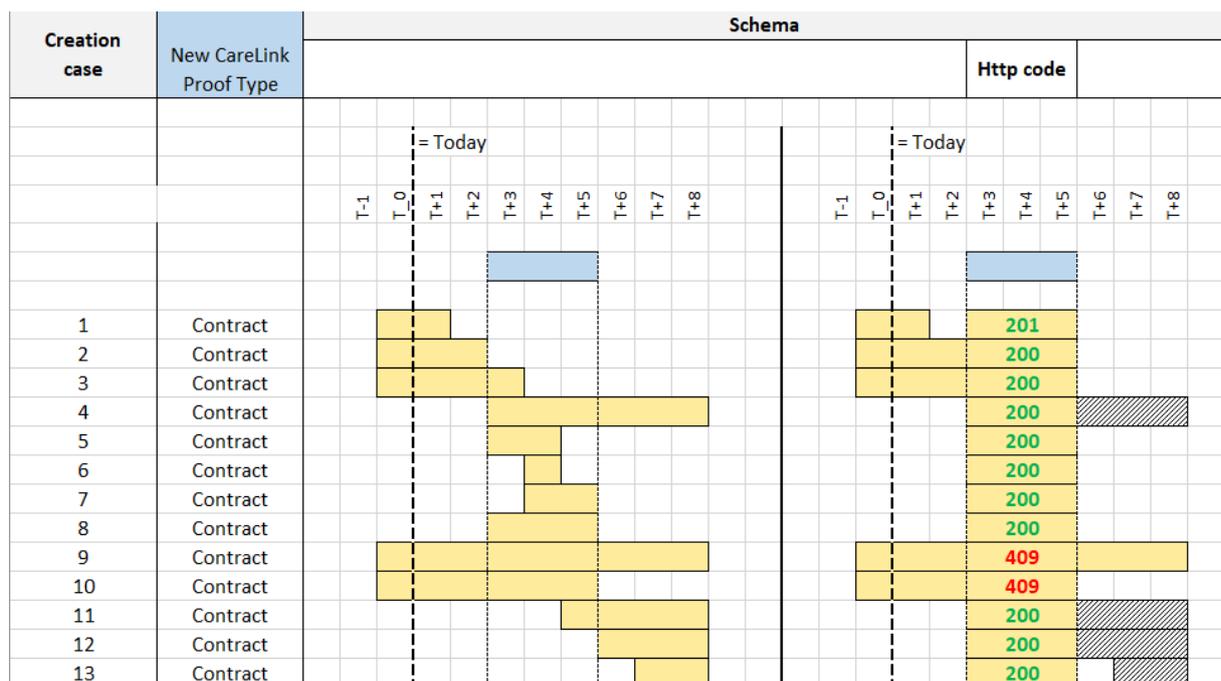


```

    {
      "type": "ssin",
      "value": "9xxxxxxxxx1"
    },
    {
      "type": "cardNumber",
      "value": "5xxxxxxxxx9"
    }
  ],
  "name": "PatientLastName",
  "firstName": "PatientFirstName"
},
"proof": {
  "type": "contract"
},
"type": "careinstitutionstay",
"startDate": "2020-02-24",
"endDate": "2025-02-24"
}

```

Creation of care link that will be active in the future ('startDate' > current date = 24/02/2020) for any patient (more than 3 months) :

POST /careLinks

```

{
  "patient": {
    "identifiers": [
      {
        "type": "ssin",
        "value": "9xxxxxxxxx1"
      },
      {
        "type": "cardNumber",
        "value": "5xxxxxxxxx9"
      }
    ]
  },
  "name": "PatientLastName",
  "firstName": "PatientFirstName"
},
"proof": {
  "type": "contract"
},
"type": "careinstitutionstay",
"startDate": "2021-02-24",
"endDate": "2025-02-24"
}

```

Creation of an active care link directly ('startDate' = current date = 24/02/2020) for a new born patient (less than 3 months) :

POST /careLinks

```

{
  "patient": {
    "identifiers": [
      {
        "type": "ssin",
        "value": "9xxxxxxxxx1"
      }
    ]
  },
  "name": "PatientLastName",

```

```

    "firstName": "PatientFirstName"
  },
  "proof": {
    "type": "contract"
  },
  "type": "careinstitutionstay",
  "startDate": "2020-02-24",
  "endDate": "2025-02-24"
}

```

Creation of care link that will be active in the future ('startDate' > current date = 24/02/2020) for a new born patient (less than 3 months) :

POST /careLinks

```

{
  "patient": {
    "identifiers": [
      {
        "type": "ssin",
        "value": "9xxxxxxxxx1"
      }
    ],
    "name": "PatientLastName",
    "firstName": "PatientFirstName"
  },
  "proof": {
    "type": "contract"
  },
  "type": "careinstitutionstay",
  "startDate": "2021-02-24",
  "endDate": "2025-02-24"
}

```

5.2.1.2 Response

Success:

HTTP code 201 (Created) returned in case of success for the creation of the link.

HTTP code 200 (Success) is returned in case an existing link with the same attributes was already present. In this case, the link is extended to the new end date.

Error:

HTTP code 409 (Conflict) returned in case of an existing link covering the period of the posted link.

Failures:

For failure description please refer to section 8 of this cookbook.

5.2.1.3 Proof

A proof represents the 'technical' means used to 'prove' the care relation. More generally, a proof can be associated to an operation performed on a care link. These proofs can have various 'natures' represented by the 'type of the proof'. The types of proof are part of the open list of proof published at

<https://www.ehealth.fgov.be/standards/kmehr/en/tables/proof-type>

Currently, eHealth platform supports only these cards and these types of proof:

Type of the proof	Given proof	Meaning	Authorized type of link
eidreading	eID card number	Reading the eID card	careinstitutiondaycare careinstitutionstay carerelation



eidencoding_housecall	eID card number	Encoding the eID Card during a house call	careinstitutiondaycare careinstitutionstay carerelation
eidencoding_nocard	eID card number	Encoding the eID Card	careinstitutiondaycare careinstitutionstay carerelation
eidencoding_techproblem	eID card number	Encoding the eID Card during a technical problem	careinstitutiondaycare careinstitutionstay carerelation
isireading	ISI+ card number	Reading the ISI+ card	careinstitutiondaycare careinstitutionstay carerelation
phone_call	eID or ISI+ card number or no proof (only for new born)	Encoding the support card number after a phone call	careinstitutionremotecontact
contract	eID or ISI+ card number or no proof (only for new born)	Reading or encoding the support card number under the existence of a contract	careinstitutiondaycare careinstitutionstay carerelation

These types include the reading or encoding of the patient's Belgian electronic identity card or the Belgian social identity card (ISI+) to retrieve the patient SSIN and support card number. They are necessary for managing non-referral care links.

5.2.2 DELETE /careLinks

The requests of type "DELETE" on path /careLinks allow the user to either revoke an active care link, or delete a care link created in the future and not yet active.

5.2.2.1 Request

queryParameter	Description
patientSsin (mandatory)	Social Security Identification Number (SSIN) of the patient concerned by the care link.
hcPartyId (mandatory)	Identifier of the HC party concerned by the care link. The HC Party can be a HC professional or an organization. The identification data if the HC party is a HC professional is : <ul style="list-style-type: none"> An SSIN number The identification data if the HC party is an organization is either: <ul style="list-style-type: none"> A CBE number (10 digits) A NIHII number (8 digits or 11 digits) An EHP number (10 digits)
hcPartyIdType (mandatory)	The type of identifier put in the field "hcPartyId". This string can take four possible values:



	<ul style="list-style-type: none"> • “ssin” • “nihii” • “cbe” • “ehp”
linkType (mandatory)	<p>The type of the care link to delete.</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • ‘careinstitutionremotcontact’ • ‘careinstitutiondaycare’ • ‘careinstitutionstay’ <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • ‘carerelation’
deleteFuture (optional)	<p>This boolean argument, if specified and set to “true”, states that the requests targets an inactive care link beginning in the future. Because it does not exist yet, it will be solely deleted instead of a revocation.</p>

Example:

```
DELETE
/careLinks?patientSsin=9xxxxxxxxx1&hcPartyId=9xxxxxxxxx1&hcPartyIdType=cbe&linkType=careinstitutiondaycare
```

5.2.2.2 Response

Success:

HTTP code 204 (No Content) returned in case of success for the revocation/deletion of the link.

Error:

HTTP code 404 (Not Found) returned in case of no existing link matching the given arguments.

Failures:

For failure description please refer to section 8 of this cookbook.

5.3 GET /careLinks

The requests of type “GET” on path /careLinks allows the user to retrieve the list of either active or future care links, depending on the specified arguments.

5.3.1.1 Request

queryParameter	Description
patientSsin (optional)	Social Security Identification Number (SSIN) of the patient concerned by the care link.
hcPartyId (optional)	Identifier of the HC party concerned by the care link. The HC Party can be a HC professional or an organization.



	<p>The identification data if the HC party is a HC professional is :</p> <ul style="list-style-type: none"> • An SSIN number <p>The identification data if the HC party is an organization is either:</p> <ul style="list-style-type: none"> • A CBE number (10 digits) • A NIHII number (8 digits or 11 digits) • An EHP number (10 digits)
hcPartyIdType (optional)	<p>The type of identifier put in the field '<i>hcPartyId</i>'. This string can take four possible values:</p> <ul style="list-style-type: none"> • "<i>ssin</i>" • "<i>nihii</i>" • "<i>cbe</i>" • "<i>ehp</i>"
linkType (optional)	<p>The type of the care link to consult.</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • '<i>careinstitutionremotcontact</i>' • '<i>careinstitutiondaycare</i>' • '<i>careinstitutionstay</i>' <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • '<i>carerelation</i>' <p>This argument can be specified as an array having multiple values</p>
includeFuture (optional)	<p>This boolean argument, if specified and set to "true", states that the request must also match the inactive carelinks (beginning in the future).</p>

Although all the arguments are declared as optional in the part of the swagger defining the GET operation, a few additional rules apply:

- If the token role is "consult-carelink-superuser", then at least one of '*patientSsin*' or '*hcPartyId*' must be provided.
- If an '*hcPartyId*' is provided, the '*hcPartyIdType*' MUST also be provided.
- If the token role is "consult-carelink-orgcot" or "consult-carelink-orgnocot" then the elements '*hcPartyId*' and '*hcPartyIdType*' should not be used (must be missing). For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.

Warning: it is possible in the future to have a ban on the use of this element following a decision by BelRAI VL which still has to be taken. In that case, if provided then the request will be rejected.

The type of proof is never returned in the response ('proof' is always set to the value null).

Example:

```
GET /careLinks?patientSsin=9xxxxxxxxx1&linkType=careinstitutiondaycare
```

5.3.1.2 Response

Success:

HTTP code 200 (Success) returned in case of a non-empty list of care links found.

In this case, the body contains an array of link objects :

```
[
  {
    "patient": {
      "identifiers": [
        {
          "type": "ssin",
          "value": "12345678910"
        }
      ],
      "name": "patientName",
      "firstName": "patientFirstName"
    },
    "hcParty": {
      "identifiers": [
        {
          "type": "cbe",
          "value": "0123456789"
        }
      ],
      "name": "hcpName",
      "firstName": null,
      "qualificationCode": null
    },
    "type": "carelinktype",
    "startDate": "2020-01-23",
    "endDate": "2020-02-23",
    "proof": null
  }
]
```

HTTP code 204 (No content) returned in case no care link could be found matching the provided arguments.

In this case, the body will be an empty array

```
[ ]
```

Failures:

For failure description please refer to section 8 of this cookbook.

5.4 GET /careLinks/existences

The requests of type "GET" on path /careLinks/existences allow the user to check the existence of an active care link matching the specified arguments.

5.4.1.1 Request

queryParameter	Description
patientSsin (mandatory)	Social Security Identification Number (SSIN) of the patient concerned by the care links.



hcPartyId (optional)	<p>Identifier of the HC party concerned by the care link. The HC Party can be a HC professional or an organization.</p> <p>The identification data if the HC party is a HC professional is :</p> <ul style="list-style-type: none"> • An SSIN number <p>The identification data if the HC party is an organization is either:</p> <ul style="list-style-type: none"> • A CBE number (10 digits) • A NIHII number (8 digits or 11 digits) • An EHP number (10 digits)
hcPartyIdType (optional)	<p>The type of identifier put in the field <i>'hcPartyId'</i>. This string can take four possible values:</p> <ul style="list-style-type: none"> • <i>"ssin"</i> • <i>"nihii"</i> • <i>"cbe"</i> • <i>"ehp"</i>
linkType (optional)	<p>The type of the care link to consult.</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • <i>'careinstitutionremotecontact'</i> • <i>'careinstitutiondaycare'</i> • <i>'careinstitutionstay'</i> <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • <i>'carerelation'</i> <p>This argument can be specified as an array having multiple values.</p>

- If an *'hcPartyId'* is provided, the *'hcPartyIdType'* MUST also be provided.
- If the token role is "consult-carelink-orgcot" or "consult-carelink-orgnocot" then the elements *'hcPartyId'* and *'hcPartyIdType'* should not be used (must be missing). For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.

Warning: In the future, the use of this element may be banned following a decision by BeRAI VL that has still to be made. If this ban is enacted, any request including this element will be rejected.

- If the token role is "consult-carelink-superuser" or "verify-carelink" then the elements *'hcPartyId'* and *'hcPartyIdType'* must be specified.

Example:

GET /carelinks/existences?patientSsin=9xxxxxxxxxl&linkType=careinstitutiondaycare

5.4.1.2 Response

Success:

HTTP code 200 (Success) returned if an active care link matches the specified arguments.

HTTP code 204 (No content) returned in case no care link could be found matching the provided arguments.



Failures:

For failure description please refer to section 8 of this cookbook.

5.5 GET /careLinks/histories

The requests of type “GET” on path /careLinks/histories allow the user to retrieve the list of either inactive care links that have expired.

5.5.1.1 Request

queryParameter	Description
patientSsin (optional)	Social Security Identification Number (SSIN) of the patient concerned by the care links.
hcPartyId (optional)	Identifier of the HC party concerned by the care link. The HC Party can be a HC professional or an organization. The identification data if the HC party is a HC professional is : <ul style="list-style-type: none">• An SSIN number The identification data if the HC party is an organization is either: <ul style="list-style-type: none">• A CBE number (10 digits)• A NIHI number (8 digits or 11 digits)• An EHP number (10 digits)
hcPartyIdType (optional)	The type of identifier put in the field ' <i>hcPartyId</i> '. This string can take four possible values: <ul style="list-style-type: none">• "<i>ssin</i>"• "<i>nihi</i>"• "<i>cbe</i>"• "<i>ehp</i>"
linkType (optional)	The type of the care link to consult. Currently, 3 values are available for a care link linked to an organization : <ul style="list-style-type: none">• '<i>careinstitutionremotecontact</i>'• '<i>careinstitutiondaycare</i>'• '<i>careinstitutionstay</i>' The following value is available for a care link linked to an individual care provider : <ul style="list-style-type: none">• '<i>carerelation</i>' This argument can be specified as an array having multiple values

Although all the arguments are declared as optional in the swagger definition of the GET operation, a few additional rules apply:



- If the token role is “consult-carelink-superuser”, at least one of ‘patientSsin’ or ‘hcPartyId’ must be provided.
- If an ‘hcPartyId’ is provided, the ‘hcPartyIdType’ MUST also be provided.
- If the token role is “consult-carelink-orgcot” or “consult-carelink-orgnocot” the elements ‘hcPartyId’ and ‘hcPartyIdType’ should not be used (must be missing). For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.

Warning: it is possible in the future to have a ban on the use of this element following a decision by BelRAI VL which still has to be taken. In that case, if provided the request will be rejected.

The type of proof is never returned in the response (‘proof’ is always set to the value null).

Example:

```
GET
/carelinks/histories?patientSsin=9xxxxxxxxx1&hcPartyId=0xxxxxxxxx2&hcPartyIdType=cbe
```

5.5.1.2 Response

Success:

HTTP code 200 (Success) returned in case of a non-empty list of care links found.

➔ In this case, the body contains an array of link objects :

```
[
  {
    "patient": {
      "identifiers": [
        {
          "type": "ssin",
          "value": "12345678910"
        }
      ],
      "name": "patientName",
      "firstName": "patientFirstName"
    },
    "hcParty": {
      "identifiers": [
        {
          "type": "cbe",
          "value": "0123456789"
        }
      ],
      "name": "hcpName",
      "firstName": null,
      "qualificationCode": null
    },
    "type": "carelinktype",
    "startDate": "2020-01-23",
    "endDate": "2020-02-23",
    "proof": null
  }
]
```

HTTP code 204 (No content) returned in case no care link could be found matching the provided arguments.

➔ In this case, the body will be an empty array

```
[ ]
```

Failures:

For failure description please refer to section 8 of this cookbook.



5.6 GET /careLinks/Pages

The requests of type “GET” on path /careLinks/pages allows the user to retrieve the list of either active or future care links with pagination.

5.6.1.1 Request

queryParameter	Description
patientSsin (optional)	Social Security Identification Number (SSIN) of the patient concerned by the care link.
hcPartyId (optional)	<p>Identifier of the HC party concerned by the care link. The HC Party can be a HC professional or an organization.</p> <p>The identification data if the HC party is a HC professional is :</p> <ul style="list-style-type: none"> • An SSIN number <p>The identification data if the HC party is an organization is either:</p> <ul style="list-style-type: none"> • A CBE number (10 digits) • A NIHII number (8 digits or 11 digits) • An EHP number (10 digits)
hcPartyIdType (optional)	<p>The type of identifier put in the field ‘<i>hcPartyId</i>’. This string can take four possible values:</p> <ul style="list-style-type: none"> • “<i>ssin</i>” • “<i>nihii</i>” • “<i>cbe</i>” • “<i>ehp</i>”
linkType (optional)	<p>The type of the care link to consult.</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • ‘<i>careinstitutionremotcontact</i>’ • ‘<i>careinstitutiondaycare</i>’ • ‘<i>careinstitutionstay</i>’ <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • ‘<i>carerelation</i>’ <p>This argument can be specified as an array having multiple values</p>
includeFuture (optional)	This boolean argument, if specified and set to “true”, states that the request must also match the inactive carelinks (beginning in the future).
pageSize (optional)	<p>The parameter allowing to limit the number of entries in the result.</p> <p>The pagesize value is limited to a minimum of 10 and a maximum of 1500</p>

	<p>If the 'pageSize' parameter is not specified then the first 100 care links are returned (By default the value is 100).</p> <p>The result are organized in descending chronological order.</p>
page (optional)	<p>This parameter allow select a specific page to display.</p> <p>By default the value is 1.</p>

Although all the arguments are declared as optional in the part of the swagger defining the GET operation, a few additional rules apply:

- If the token role is “consult-carelink-superuser”, then at least one of ‘patientSsin’ or ‘hcPartyId’ must be provided.
- If an ‘hcPartyId’ is provided, the ‘hcPartyIdType’ MUST also be provided.
- If the token role is “consult-carelink-orgcot” or “consult-carelink-orgnocot” then the elements ‘hcPartyId’ and ‘hcPartyIdType’ should not be used (must be missing). For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.
- If pageSize value
 - Must be valid numerical value (natural number)
 - Must be in the range of minimum 100 & maximum 1500
- If page value
 - Must be valid numerical value (natural number)
 - Must not be above the total page value

The type of proof is never returned in the response (‘proof’ is always set to the value null).

Example:

```
GET
/careLinks/pages?patientSsin=9xxxxxxxxx1&linkType=careinstitutiondaycare&page=2&pageSize=200
```

5.6.1.2 Response

Success:

HTTP code 200 (Success) returned in case of a non-empty list of care links found.

In this case, the body contains an array of link objects :

```
{
  "items": [
    {
      "endDate": "2024-03-26",
      "hcParty": {
        "firstName": "string",
        "identifiers": [
          {
            "type": "string",
            "value": "string"
          }
        ]
      }
    }
  ]
}
```



```

    ],
    "name": "string",
    "qualificationCode": "string"
  },
  "patient": {
    "firstName": "string",
    "identifiers": [
      {
        "type": "string",
        "value": "string"
      }
    ],
    "name": "string"
  },
  "proof": {
    "type": "string"
  },
  "startDate": "2024-03-26",
  "type": "string"
}
],
"next": "/careLinks?patientSsin=9xxxxxxxxxx&page=3&pageSize=200",
"page": 2,
"pageSize": 200,
"self": "/careLinks?patientSsin=9xxxxxxxxxx&page=2&pageSize=200",
"total": 500
}

```

HTTP code 204 (No content) returned in case no care link could be found matching the provided arguments.

In this case, the body will be an empty array

```
[ ]
```

Failures:

For failure description please refer to section 8 of this cookbook.

5.7 GET /careLinks/histories/pages

The requests of type "GET" on path /careLinks/histories/pages allow the user to retrieve the list of either inactive care links that expired in the past with pagination.

5.7.1.1 Request

queryParameter	Description
patientSsin (optional)	Social Security Identification Number (SSIN) of the patient concerned by the care links.
hcPartyId (optional)	Identifier of the HC party concerned by the care link.



	<p>The HC Party can be a HC professional or an organization.</p> <p>The identification data if the HC party is a HC professional is :</p> <ul style="list-style-type: none"> • An SSIN number <p>The identification data if the HC party is an organization is either:</p> <ul style="list-style-type: none"> • A CBE number (10 digits) • A NIHI number (8 digits or 11 digits) • An EHP number (10 digits)
hcPartyIdType (optional)	<p>The type of identifier put in the field '<i>hcPartyId</i>'. This string can take four possible values:</p> <ul style="list-style-type: none"> • "<i>ssin</i>" • "<i>nihi</i>" • "<i>cbe</i>" • "<i>ehp</i>"
linkType (optional)	<p>The type of the care link to consult.</p> <p>Currently, 3 values are available for a care link linked to an organization :</p> <ul style="list-style-type: none"> • '<i>careinstitutionremotcontact</i>' • '<i>careinstitutiondaycare</i>' • '<i>careinstitutionstay</i>' <p>The following value is available for a care link linked to an individual care provider :</p> <ul style="list-style-type: none"> • '<i>carerelation</i>' <p>This argument can be specified as an array having multiple values</p>
pageSize (optional)	<p>The parameter allowing to limit the number of entries in the result.</p> <p>The page size value is limited to a minimum of 10 and a maximum of 1500</p> <p>If the 'pageSize' parameter is not specified then the first 100 care links are returned (By default the value is 100).</p> <p>The result are organized in descending chronological order.</p>
page (optional)	<p>This parameter allow select a specific page to display.</p> <p>By default the value is 1.</p>

Although all the arguments are declared as optional in the swagger definition of the GET operation, a few additional rules apply:

- If the token role is "consult-carelink-superuser", at least one of '*patientSsin*' or '*hcPartyId*' must be provided.
- If an '*hcPartyId*' is provided, the '*hcPartyIdType*' MUST also be provided.



- If the token role is “consult-carelink-orgcot” or “consult-carelink-orgnocot”, the elements ‘hcPartyId’ and ‘hcPartyIdType’ should not be used (must be missing). For these users, the hcParty concerned by the care link will be deduced from the identification data contained in the access token.

The type of proof is never returned in the response (‘proof’ is always set to the value null).

- If pageSize value
 - Must be valid numerical value (natural number)
 - Must be in the range of minimum 100 & maximum 1500
- If page value
 - Must be valid numerical value (natural number)
 - Must not be above the total page value

Example: With usage of page and pageSize

```
GET
/carelinks/histories/pages?patientSsin=9xxxxxxxxx1&hcPartyId=0xxxxxxxxx2&hcPartyIdType=cbe&page=2&pageSize=200
```

5.7.1.2 Response

Success:

HTTP code 200 (Success) returned in case of a non-empty list of care links found.

➔ In this case, the body contains an array of link objects :

```
{
  "items": [
    {
      "endDate": "2024-03-26",
      "hcParty": {
        "firstName": "string",
        "identifiers": [
          {
            "type": "string",
            "value": "string"
          }
        ],
        "name": "string",
        "qualificationCode": "string"
      },
      "patient": {
        "firstName": "string",
        "identifiers": [
          {
            "type": "string",
            "value": "string"
          }
        ],
        "name": "string"
      },
      "proof": {
        "type": "string"
      }
    }
  ]
}
```

```

    "startDate": "2024-03-26",
    "type": "string"
  },
  {
    "endDate": "2024-03-26",
    "hcParty": {
      "firstName": "string",
      "identifiers": [
        {
          "type": "string",
          "value": "string"
        }
      ],
      "name": "string",
      "qualificationCode": "string"
    },
    "patient": {
      "firstName": "string",
      "identifiers": [
        {
          "type": "string",
          "value": "string"
        }
      ],
      "name": "string"
    },
    "proof": {
      "type": "string"
    },
    "startDate": "2024-03-26",
    "type": "string"
  }
],
"next": "/careLinks?patientSsin=9xxxxxxxx&page=3&pageSize=200",
"page": 2,
"pageSize": 200,
"self": "/careLinks?patientSsin=9xxxxxxxx&page=2&pageSize=200",
"total": 500
}

```

HTTP code 204 (No content) returned in case no care link could be found matching the provided arguments.

➔ In this case, the body will be an empty array

```
[ ]
```

Failures:

For failure description please refer to section 8 of this cookbook.



6. Risks and security

6.1 Risks & safety

6.2 Security

6.2.1 Business security

In the case the development adds an additional use case based on an existing integration, the eHealth platform must be informed at least one month in advance with a detailed estimate of the expected load. This will ensure effective capacity management.

In the case of technical issues with the WS, the partner may obtain support from the contact center.

If the eHealth platform finds a bug or vulnerability in its software, the partner is advised to update their application with the newest version of the software within 10 business days.

If the partner finds a bug or vulnerability in the software or web service delivered by the eHealth platform, they are obliged to contact and inform the eHealth platform immediately and are not allowed to publish this bug or vulnerability under any circumstances.

6.2.2 The use of username, password and token

The username, password and token are strictly personal and are not transferable.

Each user is responsible for their username, password and token and must maintain their confidentiality.

Every user is also responsible for any use, including use by a third party, until deactivation.

7. Implementation aspects

7.1 Procedure

This chapter explains the procedures for testing and releasing an application in acceptance or production.

7.1.1 Initiation

If you intend to use the eHealth platform service, please contact info@ehealth.fgov.be. The project department will provide you with the necessary information and mandatory documents.

7.1.2 Development and test procedure

You have to develop a client in order to connect to our WS. Most of the required info to integrate is published on the portal of the eHealth platform.

Upon request, the eHealth platform provides you with test cases (see *Request Test Case template*) in order for you to test your client before the release in the acceptance environment.

7.1.3 Release procedure

When development tests are successful, you can request access to the acceptance environment of the eHealth platform. At this point, you will start the integration and acceptance tests. The eHealth platform recommends testing for a minimum of one month.

After successful acceptance tests, the partner sends the test results and performance results along with samples of an “eHealth request” and an “eHealth answer” by email to the point of contact at the eHealth platform.

The eHealth platform and the partner then agree on a release date. The eHealth platform prepares the connection to the production environment and provides the partner with the necessary information. On the release day, the partner provides the eHealth platform with feedback on the tests.

For further information and instructions, please contact: integration-support@ehealth.fgov.be.

7.1.4 Operational follow-up

Once in production, the partner using the eHealth platform service for one of his applications must always test first in the acceptance environment before releasing any adaptations of its application in production. In addition, he will inform the eHealth platform about the progress and test period.

8. Error and failure messages

8.1 HTTP codes

8.1.1 HTTP 2xx

The meaning of 2xx HTTP codes is described in each Operation in section 5 of this document.

8.1.2 HTTP 500

This code indicates that an internal technical error occurred while processing the request. However, it is important to note that the error might still be attributed to incorrect input in the request.

Please double-check your request before reaching to the helpdesk.

8.1.3 HTTP 400

This code indicates that the request could not be performed due to a validation error.

The returned body provides details on what went wrong in your request.

Example:

```
[
  {
    "code": "ERR042",
    "message": "Link already exists."
  }
]
```

Here are the possible values that you can get in the body for the “400” errors:

ERR004	"The provided hcParty identifier: {[hcParty.id]} is different than HCParty identifier in token: {[token.hcp.id]}."
ERR005	"The provided patient.identifiers.type cannot be blank."
ERR006	"The provided patient.identifiers.type: {[patient.identifiers.type]} is incorrect. It should be one of following values : [ssin cardNumber]."
ERR007	"The patient ssin is mandatory and cannot be missing."
ERR008	"The provided patient ssin cannot be blank."
ERR009	"The provided patient ssin: {[patient.id]} has an incorrect length. Length should be 11. Got {[patient.id.length()}]."
ERR010	"The provided patient ssin: {[patient.id]} can only contain digits."
ERR011	"The provided patient ssin: {[patient.id]} has an incorrect checksum."
ERR012	"The provided patient ssin is incorrect: multiple patient ssin is forbidden."
ERR013	"The cardNumber cannot be missing when the proof type is provided and contains one of following values : [eidreading isireading phone_call contract eidencoding_nocard eidencoding_housecall eidencoding_techproblem]."
ERR014	"The provided cardNumber cannot be blank."
ERR016	"The provided cardNumber is incorrect: multiple cardNumber is forbidden."
ERR017	"The patient name cannot be missing and must contain at least one non-empty character."
ERR018	"The provided patient name cannot be blank."

ERR019	"The provided hcParty.identifiers.type: {\${hcParty.identifiers.type}} is incorrect. It should be one of following values : [nihii ehp cbe]."
ERR020	"The provided hcParty.identifiers.type: {\${hcParty.identifiers.type}} is forbidden for the user."
ERR022	"The provided hcParty identifier: {\${hcParty.id}} can only contain digits."
ERR023	"The provided hcParty identifier: {\${hcParty.id}} has an incorrect length. Length should be 10. Got {\${hcParty.id.length()}. "
ERR024	" The provided hcParty identifier: {\${hcParty.id}} has an incorrect length. Length should be 11. Got {\${hcParty.id.length()}. "
ERR025	"The provided hcParty identifier: {\${hcParty.id}} has an incorrect checksum."
ERR029	"The provided proof type cannot be blank. It should be one of following values : [eidreading isireading phone_call contract eidencoding_nocard eidencoding_housecall eidencoding_techproblem]."
ERR030	"The provided proof type: {\${proof}} is incorrect. It should be one of following values : [eidreading isireading phone_call contract eidencoding_nocard eidencoding_housecall eidencoding_techproblem]."
ERR031	"The provided proof type: {\${proof}} is forbidden for the user if the provided link type is: {\${type}}. It should be one of following values: [phone_call]."
ERR032	"Startdate and enddate are forbidden for proof other than contract. Got {0}."
ERR033	"The provided startDate: {\${startDate}} is incorrect. startDate must be greater or equal than the declaration date."
ERR034	The provided endDate: {\${endDate}} is incorrect. endDate must be greater than the startDate.
ERR035	"The provided link type cannot be blank. It should be one of following values : [careinstitutionremotcontact careinstitutiondaycare careinstitutionstay]."
ERR036	"The provided link type: {\${type}} is incorrect. It should be one of following values : [careinstitutionremotcontact careinstitutiondaycare careinstitutionstay]."
ERR041	"The provided cardNumber: {\${cardNumber}} does not correspond to the patient ssin."
ERR042	"Link already exists."
ERR043	"No Link found."
ERR044	"The provided patient ssin: [{0}] is malformed."
ERR046	"The use of the hcParty is mandatory for the user."
ERR047	"The provided hcParty identifier: {\${hcParty.id}} has an incorrect length. Length should be 8 or 11. Got {\${hcParty.id.length()}. "
ERR048	The provided hcParty identifier: [{\${hcParty.id}}] is malformed.
ERR049	"The provided proof type: {\${proof}} is forbidden for a newborn. It should be missing or one of following values: [phone_call contract]."
ERR051	"At least the patient ssin or the hcParty identifier should be specified."
ERR052	"The use of the hcParty is forbidden for the user."
ERR053	"The hcParty identifier and hcParty.identifiers.type must be used together."
ERR054	"The provided link type: {\${type}} is incorrect. It should be one of following values : [careinstitutionremotcontact careinstitutiondaycare careinstitutionstay carerelation]."
ERR055	"The provided page value is not the expected value. It should be a numerical value"
ERR056	"The provided page value is not the expected value. It should be a valid number (start at 1)"

ERR057	"The provided page value is greater than the total page value"
ERR058	"The provided pagesize value is not the expected value. It should be a numerical value"
ERR059	"The provided pagesize value is not the expected value. The maximum size is 1500"
ERR060	"The provided pagesize value is not the expected value. The minimum size is 1"

9. Annex 1 – Claim structure

This section explains the structure of the claims that allow to define the authorized users.

9.1 Organization (No-AR78)

To define an organization as authorized user, the JSon Web token of the user must contain the following attributes :

- The chosen profile : ORGANIZATION
- The information about the organization
 - The identifier of the organization (required)
 - The type of the organization (required)
 - The name of the organization (required)

```
"profile_option": "ORGANIZATION",  
  
  "org": {  
    "type": "ENTERPRISE",  
    "name": "Name of the organization",  
    "id": "1234567890"  
  }
```

This is the list of organization qualities available:

- ENTERPRISE, TREAT_CENTER, CONSORTIUM (type: cbe)
- EHP, CTRL_ORGANISM (id type: ehp)
- All entities recognized by NIHII (id type: nihii)